

Rotary union

2 Channels

Typ DDF-2


General data

Pressure*: -0,9 bar / 16 bar
on request: 100 bar


Temperature*: 0°C / +80°C
enlarged temperature range on request

Seal material: NBR
other seal materials on request (e.g. FKM)

Art.-No.	Type	Channels	Flow (per channel)	Weight	Middle Torque**	Rotation* (rpm)
ZK5491	DDF-2-M5	2	150 l/min	0,3 kg	1,4 Nm	300
ZK5504	DDF-2-1/8	2	600 l/min	0,8 kg	1,5 Nm	300
ZK5505	DDF-2-1/4	2	1.300 l/min	1,2 kg	1,6 Nm	300
ZK5506	DDF-2-1/2	2	3.500 l/min	3,3 kg	4,5 Nm	300

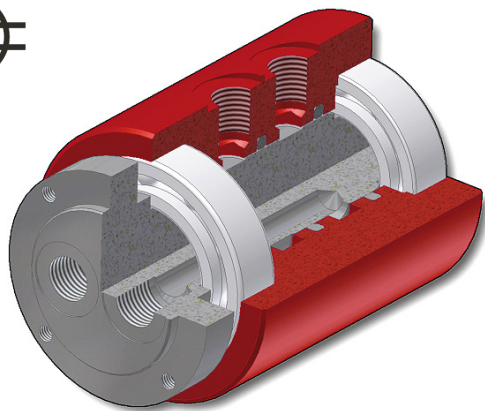

All Rotary unions are available in stainless steel
(Art.-No.... -H)

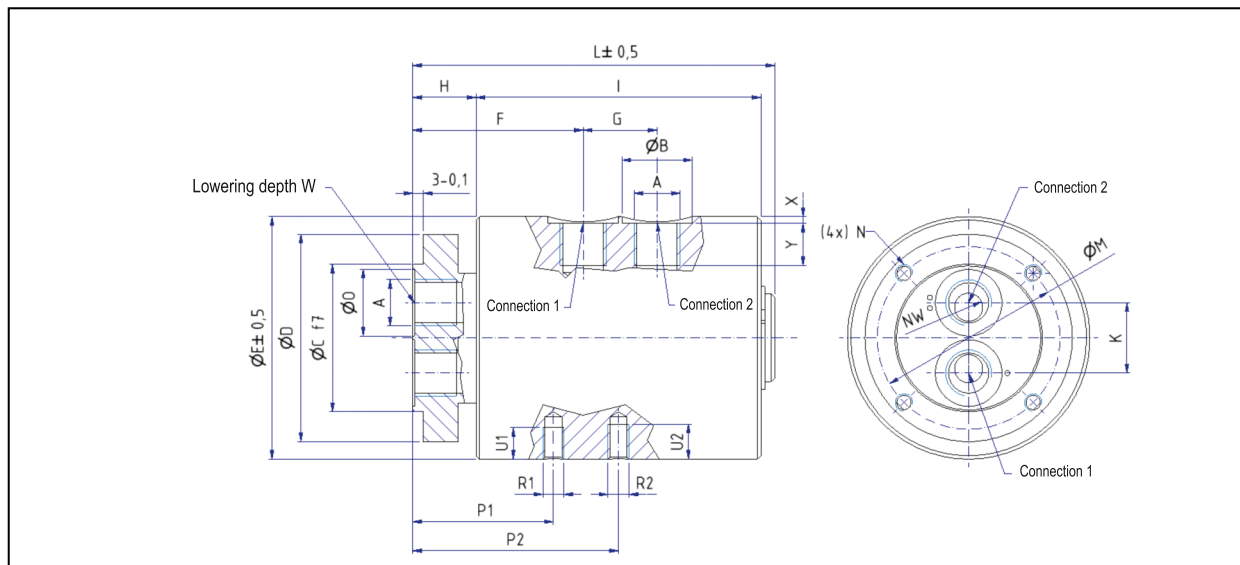

Art.-no.	A	B	C	D	E	F	G	H	I	K	L	M	N	O	NW	P1	R1	U1	P2	R2	U2	W	X	Y
ZK5491	M5	9	21	35	37	36,0	16	13	60	10	77	28	M5	9	3	31	M5	5	43,0	M5	5	0,5	1,00	4,5
ZK5504	G1/8"	16	35	49	59	46,0	18	18	72	17	94	42	M5	16	6	40	M6	10	54,0	M6	10	0,5	1,25	9,0
ZK5505	G1/4"	20	42	59	69	48,5	21	18	81	20	103	52	M5	19	8	40	M6	9	58,5	M6	9	0,5	1,90	12,0
ZK5506	G1/2"	28	66	84	94	60,0	33	20	113	30	138	74	M6	28	15	50	M8	9	76,5	M8	9	0,5	2,60	14,0

Rotary union

General information

Application

Rotary unions distributors are used as a connection between stationary and rotating machinery elements.

The 1-Channel-series (DDF-1) offers an optimum in flexibility for your installation, because of its radial and axial exit.

The multiple series offers the corresponding number of channels for the transmission of medium. Different or several media can be transmitted through (requires clarification with Konstandin GmbH).

Assembly / Usage

The fastening bores of the rotary union can be used to lock the unit against rotation, but they can not be used to tie it.

Fast oscillate motions (that means, changes in direction less than 2 sec.) are reducing the life time of about 50 %.

In order to avoid an overheating of the rotary union ($>80^{\circ}\text{C}$ / $>100^{\circ}\text{C}$ – depending on version) the flow quantity of the medium has to be sufficient all time.

At passage of different or several media through the rotary union an outleak line will be necessary for security. Please contact our Technical Division.

Special constructions are generally possible.

Service

All rotary unions are checked before shipment. This inspection ensures the faultless condition of the unit when receiving it, so that it can be installed on time.

General information

Pressure*	-0,9 bar / 16 bar	
	on request: 40 bar	1 Channel (Type DDF-1)
	100 bar	multiple series
	other pressure range	
Temperature*	0°C / +100°C	1 Channel (Type DDF-1)
	0°C / + 80°C	multiple series
	enlarged temperature range on request	
Medium	compressed air, vacuum	
	on request:	hydraulic oil, water, other / different media
Filtering	liquid media:	5 µm
	gaseous media:	30 µm
Material	housing:	aluminium - red anodized optionally stainless steel (Art-No.... -H)
	spindle:	stainless steel

Warranty

Konstandin GmbH guarantees the faultless condition concerning material and fashioning of the delivered products. The warranty period and responsibility are established in legal rights.

We give a 6-month guarantee (from delivery) for sealing components and expendable parts when using the rotary unions due to our operating conditions.

The responsibility for resend rotary unions is explicitly limited on replacement and repair of the unit or parts of it, which are definitely faulty.

Konstandin GmbH is not responsible for damaging after effects, which can result out the usage of such faulty elements.

The warranty goes out in case the rotating unit has been dismantled, changed or damaged because of improper treatment.